
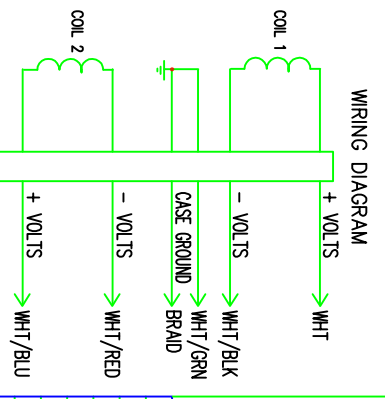


NOTES

- COIL RESISTANCE: COIL 1: 565 OHMS \pm 25%
COIL 2: 750 OHMS \pm 25%
- COIL INDUCTANCE: COIL 1: 165mH TTP
COIL 2: 160mH TTP
- OUTPUT SIGNAL: COIL 1: 7.5Vp-p
COIL 2: 6.0Vp-p
- TEST CONDITIONS: TEST GEAR: 12 PITCH
AIR GAP: 0.030"
- SPEED: 1000 I.P.S.
LOAD: 100KQ
- INSULATION RESISTANCE (IR) WINDING TO CASE: > 100 MEGOHM @ 100 VOLTS.
OPERATING TEMPERATURE: -270C TO +200C.

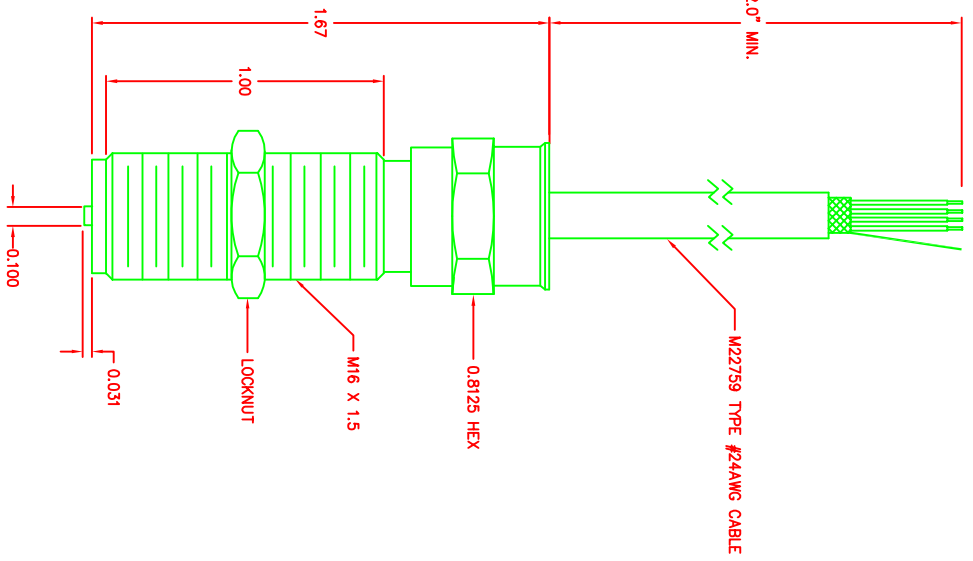

DWG NO. PC51-74E		SH 1	REV -	1
REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APP

MATERIAL		APPROVALS		DATE	TITLE
300 SERIES STAINLESS STEEL		DRAWN: JDEFEO	DATE: 01/29/11		
FINISH		CHECK: M. BERGMAN	ISSUED: JDEFEO	DATE: 01/03/12	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE THE SIZE OF PART MATERIAL SHALL BE AS FOLLOWS: 2 PLACE DECIMAL: ± .01 3 PLACE DECIMAL: ± .005 4 PLACE DECIMAL: ± .0025 ANGULAR: ± 1/2°
NEXT ASSY		APPLICATION		USED ON	CONFIDENTIAL, PROPERTY OF NOTION SENSORS, INC. (NSI) NOT TO BE DISCLOSED TO OTHERS, REPRODUCED, EXCEPT AS AUTHORIZED IN WRITING BY NSI. MUST BE RETURNED ON DEMAND.

SIZE	CAGE CODE	DWG NO	REV
C	0Y2U4	PC51-74E	-
SCALE	SHEET		